





PRODUCT INFORMATION SHEET SILENCE PLUS 2G SHORT DEEP BOWL

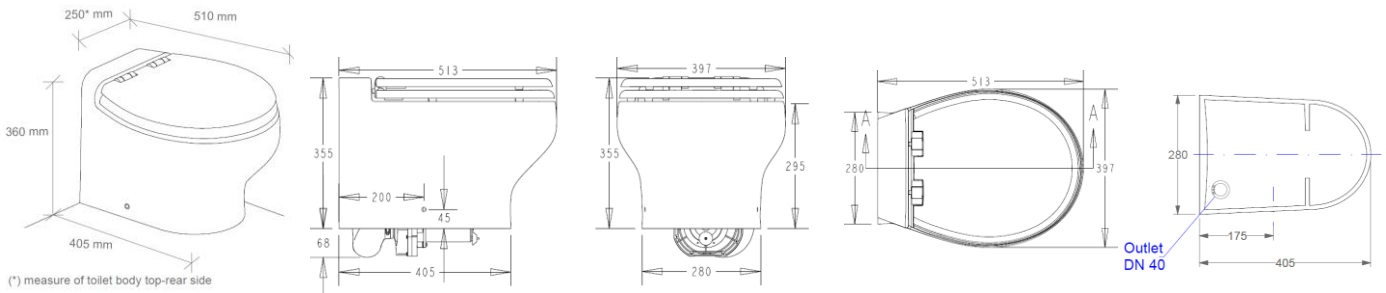

Product line	Flexi Line 2G
Collection	SILENCE PLUS 2G
Code	Depending on configuration – see code chart for details


	STANDARD CONFIGURATION	OPTIONAL CONFIGURATION
Outlet pump*	MAC 11 (DC power: 12V- 24 V)	
Seat & Cover	Wooden Polyester	Polyester with soft closing / Thermosetting with Soft Closing
Color	White	Bone, Black
Control Panel	All-in-One 1P SFT / All-in-One 2P SFT 	Multiframe 2P SFT / Touch Multifunction SFT  
Water inlet device*	Solenoid (centralized fresh water system)	Inlet pump (single raw water system)
Bidet		- Matching bidet: Bidet Silence Plus 2G Short - Integrated bidet spray nozzle function with side mounted faucet
Water consumption	0.5 / 2.7 l (0.1-0.7 gal) per flush. The user can easily adjust the amount.	
Weight	23.5 Kg (51.8 lb) (fully assembled)	

*see technical data for details

Technical data:

	WIRE GAUGE SIZE CHART	
	Distance from source* is:	
	1-2 m	> 2m
12V DC	11 AWG (4.17 mm ²)	9 AWG (6.63 mm ²)
24V DC	13 AWG (2.63 mm ²)	11 AWG (4.17 mm ²)
110-125V AC 60Hz	18 AWG (0.82 mm ²)	18 AWG (0.82 mm ²)
220-240V AC 50Hz or 60 Hz	18 AWG (0.82 mm ²)	18 AWG (0.82 mm ²)

*Distance measured assumed power and ground wires

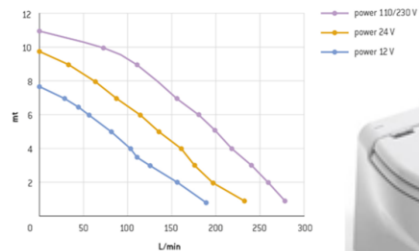

	MAC 11	OUTLET PUMP	12V DC	24V DC	110-125V AC 60Hz	220-240V AC 50Hz or 60 Hz
Fuse recommended			40A	30A	8A	5A
Pump performance	Max 270L/min 71.3 gpm Max vertical head 11mt 36.1 ft Max horizontal distance 90 mt 295.3 ft					
Outlet Duck bill valve (male)	1.5" /required ID 1.5" (38.5 mm)					

	INLET SOLENOID Centralized system	12V DC	24V DC	110-125V AC 60Hz	220-240V AC 50Hz or 60 Hz
Power consumption		9.5 W	10 W	6 W	6 W
Working pressure recommended		3 bar	3 bar	3 bar	3 bar
Solenoid Inlet and Outlet (threaded female)	1/2"				
Toilet inlet hose fitting [barbed]	20mm				

	INLET PUMP Single system (Raw water)	12V DC	24V DC
Fuse		8 A	4 A
Pressure		45 PSI - 3 bar	
Water flow		12 l/min 3.17 gmp	
Toilet inlet hose fitting [barbed]		20mm	

Notes:	For versions with integrated bidet function: 3/8" female connection for cold and hot water supply
Box dimension	67cm x 50 cm x 75 cm (LxWxH)
Packaging (units/pallet)	12